

MTC-L661H MTC-L661



FEATURES




MTC-L661H

- ◆ 1/3" High Sensitivity CCD
- ◆ 600TVL, 0 Lux (IR LED on at 2 Lux)
- ◆ Digital WDR
- ◆ Shutter Mode (Auto)
- ◆ Built-in DNR
- ◆ Smart Intelligent IR Light Control
- ◆ Water Resistance IP67 ; 12Vdc

MTC-L661

- ◆ 1/3" Med. Sensitivity CCD
- ◆ 420TVL, 0 Lux (IR LED on at 2 Lux)
- ◆ Digital WDR
- ◆ Shutter Mode (Auto)
- ◆ Built-in DNR
- ◆ Smart Intelligent IR Light Control
- ◆ Water Resistance IP67 ; 12Vdc

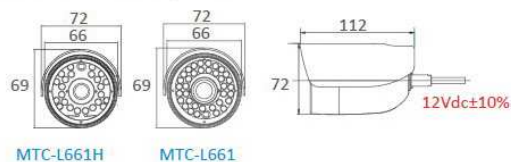

Tol:±0.5 Unit:mm

SPECIFICATIONS

	MTC-L661H		MTC-L661	
	PAL	NTSC	PAL	NTSC
TV System	PAL	NTSC	PAL	NTSC
Image Sensor	1/3" High Sensitivity CCD		1/3" Med. Sensitivity CCD	
Number of Total Pixels	795(H)x596(V)	811(H)x508(V)	537(H)x597(V)	537(H)x505(V)
Resolution ; DSP	600TVL		420TVL	
Minimum Illumination	0.00Lux			
Wide Dynamic Range	Digital WD ; 128x Normal Camera			
Video Output ; Connector	1.0Vp-p Composite, 75Ω (BNC)			
Signal to Noise Ratio (S/N)	More than 48dB			
Gamma Correction	0.45			
IR LED ; Working Distance	24 units (IR LEDs on<2Lux, IR LEDs off>5Lux) ; Outdoor: 20~25m		36 units (IR LEDs on<2Lux, IR LEDs off>5Lux) ; Outdoor: 20~25m	
Menu	NA			
Title	NA			
Synchronizing System	INTERNAL			
Digital Day&Night Mode	AUTO			
Electronic Shutter	AUTO (1/50(60)~1/100,000 sec)			
Automatic Gain Control	AUTO			
White Balance	ATW			
Back Light Compensation	OFF			
Flickerless	OFF			
Dynamic Noise Reduction	2D			
Language	NA			
Motion Detection ; Privacy	NA			
Camera Control Interface	NA			
Automatic IRIS ; Connector	NA			
Lens Mount	Built-in Board Lens			
Lens, Angle of View(H)	Standard:f4.3mm/F2.0/63°, Options:f6.0mm/F2.0/47.5°			
Water Resistance	IP67			
Max. Breaking Strength	NA			
Power Supply ; Consumption	12Vdc±10% ; IR on:3.5W, IR off:1.0W		112Vdc±10% ; IR on:4.0W, IR off:1.0W	
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C			
Operation ; Storage Humidity	Maximum: RH80% ; RH90%			
Dimensions	72(DIA)x112(L)mm			
Net Weight	350g			
Accessories Option	NA			