



## Yuasa Technical Data Sheet

### Yuasa 625SHD - Cargo Super Heavy Duty Batteries (SHD)

#### Performance

|                          |       |
|--------------------------|-------|
| Voltage                  | 12V   |
| Capacity (20-hour)       | 220Ah |
| Cold Cranking Amps (EN1) | 1150A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 513mm |
| Width  | 272mm |
| Height | 242mm |

#### Weights & Measures

|                       |             |
|-----------------------|-------------|
| Mean Weight with Acid | 57.2kg      |
| Dry Weight            | -           |
| Acid Volume           | 15.8 litres |



For Illustration Purposes Only

#### Container Features

|                           |             |
|---------------------------|-------------|
| Case Type                 | DIN C       |
| Cell Layout               | 3           |
| Hold Down                 | N           |
| State of Charge Indicator | -           |
| Handles                   | ✓           |
| End Venting               | -           |
| Semi-Traction Features    | -           |
| Lid Type                  | Raised Plug |


#### Technology

|                         |                  |
|-------------------------|------------------|
| Flame Arrestor          | ✓                |
| Technology              | Sb/Ca            |
| Separator               | PE               |
| VDA Roll Over Test      | -                |
| Vibration               | V2 (30Hz/6g/2hr) |
| Recommended Charge Rate | 12A              |

#### Battery Hold-down




#### Cell Assembly Layout

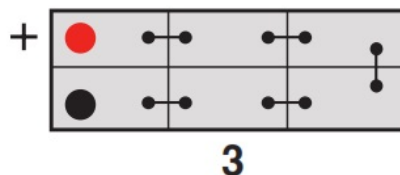


#### Terminal Type

##### T1

Standard DIN Post



Positive Terminal



Negative Terminal