


GENIUS2 6V & 12V 2A



Auto | Marine | RV | Powersport | Lawn & Garden

NOCO genius² BATTERY CHARGERTM + MAINTAINER



EVERYTHING CHARGER.

Do more with Genius. Multi-voltage, chemistries, and types.

Meet the GENIUS2 - Similar to our G1100, just better. It's 31% smaller and delivers over 82% more power. And it's simpler and easier to use than ever before. Plug-in, connect to the battery, select a charge mode, and start charging your battery. A fully-automatic, worry-free battery charger for year-round use. Designed for 6-volt and 12-volt lead-acid automotive, marine, and deep-cycle batteries, including flooded, gel, AGM, and maintenance-free, plus lithium-ion batteries.



CHARGE DOWN TO ZERO VOLTS.

Charge dead batteries as low as 1-volt. Or use the all-new Force Mode that allows you to take control and manually begin charging dead batteries down to zero volts.



BRING BATTERIES BACK TO LIFE.

Built-in desulfation mode for the most corroded batteries. Auto detection with smart diagnostic indicators starts a Repair Mode integrated within a 9-step charging profile.



THERMAL COMPENSATION.

An integrated thermal sensor detects the ambient temperature and alters the charge to eliminate over-charging in hot climates and under-charging in cold climates.

24/7

WORRY-FREE CHARGING.

Provides all-season, all-weather charging for a healthy battery. Leave plugged in 24/7 with no worries of overcharging. Automatically returns to its last selected mode.

NOCO
30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

NOCO[®]

WHAT'S IN THE BOX.

NOCO Patented Technology

Patented: visit no.co/patents

56" (142.24cm)

85" (217cm)



Charger +
Interchangeable
Connector

Battery Clamps +
Integrated Eyelets

21"
(55cm)



Mounting Bracket
+ Strap




(2) #8x1"
Self-tapping
Screws



User Guide

Maximum Versatility.

Genius clamps are built with needle-nose profiles for smaller terminal applications and detachable integrated eyelets for permanently mounting the accessory to the battery.

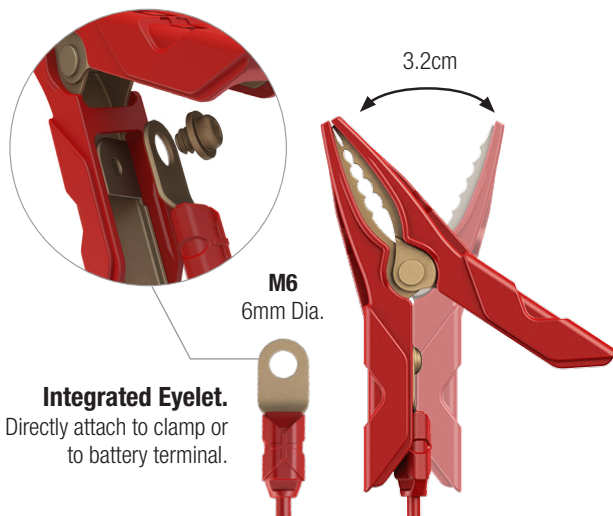

Integrated Eyelet.
Directly attach to clamp or
to battery terminal.

Technical Specifications

| | | | |
|-------------------------------|---------------------------------|----------------------------|---|
| Line Voltage AC: | 120-240 VAC, 50-60Hz | DC Cable Length: | 77.6 Inches |
| Output Power: | 30 Watts Max | AC Cable Length: | 71.7 Inches |
| Charging Voltage: | Various | Back Current Drain: | <5mA |
| Charging Current: | 2A (12V), 2A (6V) | Battery Capacity: | Up to 40Ah, Maintains All Battery Sizes |
| Chemistry: | Lead-Acid and Lithium | Housing Protection: | IP65 |
| Operating Temperature: | -4° to 104° F (-20° to +40° C) | Dimensions (LxWxH): | 3.7 x 2.4 x 1.7 Inches |
| Storage Temperature: | -22° to 140° F (-30° to +60° C) | Unit Weight: | 1.1 lbs |
| Low-Voltage Detection: | 1V (12V), 1V (6V) | Cooling: | Natural Convection |

Charging Times

(for reference,
results may vary)

| Battery Size | Approx. Charge Time in Hours | |
|--------------|------------------------------|------|
| | 6V | 12V |
| 8Ah | 3 | 3 |
| 12Ah | 4.5 | 4.5 |
| 18Ah | 6.75 | 6.75 |
| 24Ah | 9 | 9 |
| 40Ah | 15 | 15 |

What's In The Box

- Genius 2 Battery Charger w/ Interchangeable Connector
- Clamps w/ Integrated Eyelets
- Mounting Bracket w/ Strap
- (2) Self-Tapping Screws
- User Guide & Warranty Information

Retail Packaging:

Dimensions: 3.43" x 4.25" x 6.97"
Weight: 1.23lbs
UPC: 0-46221-19003-8

Inner Carton:


Dimensions: 3.70" x 4.49" x 7.20"
Weight: 1.28lbs

Master Carton:

Dimensions: 15.12" x 11.81" x 5.20"
Weight: 8.44lbs
Quantity: 6
UCC: 10046221190035

Units Per Pallet:

NA - 480 Units
International - 378 Units

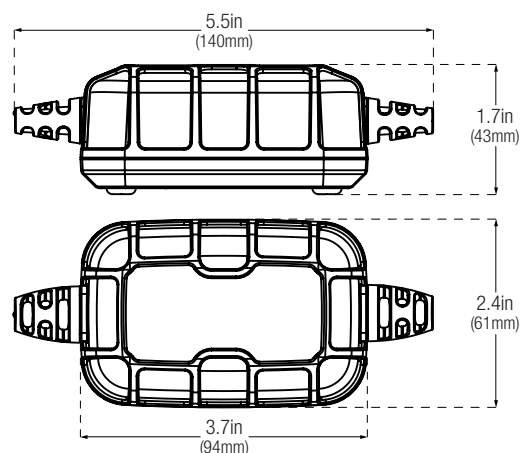

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

NOCO®