

DIGITAL MULTIMETER



V DC 600V
AC 600V


A DC 10A
AC 10A



Accessories Included

- Test Leads
- Multi-Function Socket
- Battery and User's manual

Specifications	Range	Resolution	Accuracy	
			MY75	MY78
DC Voltage	200 mV	0.01mV	±(0.05%+3)	
	2V/20V/200V	0.1mV/1mV/10mV	±(0.1%+3)	
	400mV/4V/40V/400V	0.1mV/1mV/10mV/0.1V		±(0.7%+2)
	600V	0.1V/1V	±(0.15%+3)	±(0.8%+2)
AC Voltage	2V	0.1Vm	±(0.5%+3)	
	20V/200V	1mV/10mV	±(0.8%+10)	
	400 mV	0.1mV		±(3.0%+3)
	4V/40V/400V	1mV/10mV/0.1V		±(0.8%+3)
DC Current	600V	0.1V/1V	±(1.0%+15)	±(1.2%+3)
	2mA/20mA	0.1µA/1µA	±(0.5%+50)	
	200mA	10µA	±(0.8%+50)	
	400µA/4000µA/40mA/400mA	0.1µA/1µA/10µA/0.1mA		±(1.2%+3)
AC Current	10A	1mA/10mA	±(2.0%+10)	±(2.0%+5)
	2mA/20mA	0.1µA/1µA	±(0.8%+50)	
	200mA	10µA	±(1.2%+50)	
	400µA/4000µA/40mA/400mA	0.1µA/1µA/10µA/0.1mA		±(1.5%+5)
Resistance	10A	1mA/10mA	±(2.5%+10)	±(3.0%+7)
	200Ω	0.01Ω	±(0.5%+10)	
	2kΩ	0.1Ω	±(0.3%+3)	
	20kΩ/200kΩ/2MΩ/20MΩ	1Ω/10Ω/0.1kΩ/1kΩ	±(0.3%+1)	
	400Ω/4kΩ/40kΩ/400kΩ/4MΩ	0.1Ω/1Ω/10Ω/0.1kΩ/1kΩ		±(1.2%+2)
Capacitance	200MΩ	0.01MΩ	±(5.0%+10)	
	40MΩ	0.01MΩ		±(2.0%+5)
	2µF/20µF/100µF/20nF/200nF	0.1nF/1nF/10nF/1pF/10pF	±(4.0%+20)	
Frequency	4nF	1pF		±(4.0%+25)
	40nF/400nF/4µF/40µF/200µF	0.01nF/0.1nF/1nF/10nF/0.1µF		±(4.0%+15)
	20kHz	1Hz	±(1.5%+5)	
	10Hz/100Hz/1kHz	0.01Hz/0.01Hz/0.1Hz		±(2.0%+5)
DC Current (for Clamp Meter)	10kHz/100kHz/200kHz	1Hz/10Hz/0.1kHz		±(2.0%+5)
	>200kHz	0.1kHz		Reference
AC Current (for Clamp Meter)	40A	1A/1mV	±(0.8%+3)	
	400A	1A/1mV	±(0.8%+3)	
Duty Cycle	40A	1A/1mV	±(1.0%+3)	
	400A	1A/1mV	±(1.0%+3)	
	5% ~ 95%	0.1%		±(2.0%+2)
Features				
Display	counts		20000	4000
Auto Ranging	Auto & Manual			•
REL	Relative Measurement			•
Diode	Open Voltage		3.0V	1.5V
Continuity Buzzer			<60Ω	<50±20Ω
Data Hold				•
APO	Auto Power Off			•
Transistor hFE	0~1000			•
LBD	Low Battery Display			•
General				
Power Supply	1×9V 6F22 Battery			
Product Size	MY75 188mm×93mm×50mm/7.4"×3.7"×1.96" ; MY78 189mm×91mm×31.5mm/7.67"×3.6"×1.24"			
Product Weight	MY75 380g/0.84lb ; MY78 420g/0.92lb			
Certificate	CE/ETL/RoHS			
Safety Rating	CAT III 600V			

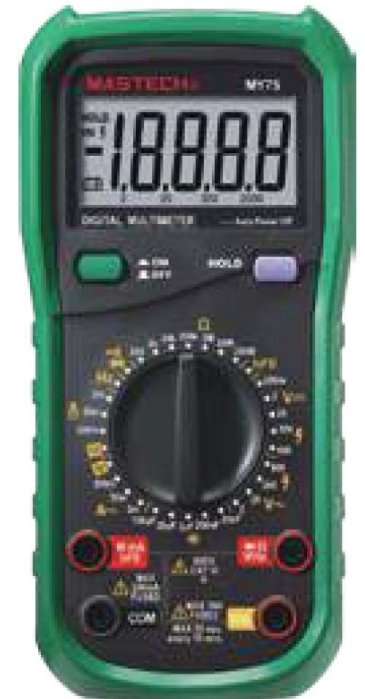

MY75